Prepare

PROSOCO R•GUARD®

Reinforce and bridge sheathing joint with Joint Fabric

www.prosoco.com

PROSOCO
SINCE 1939

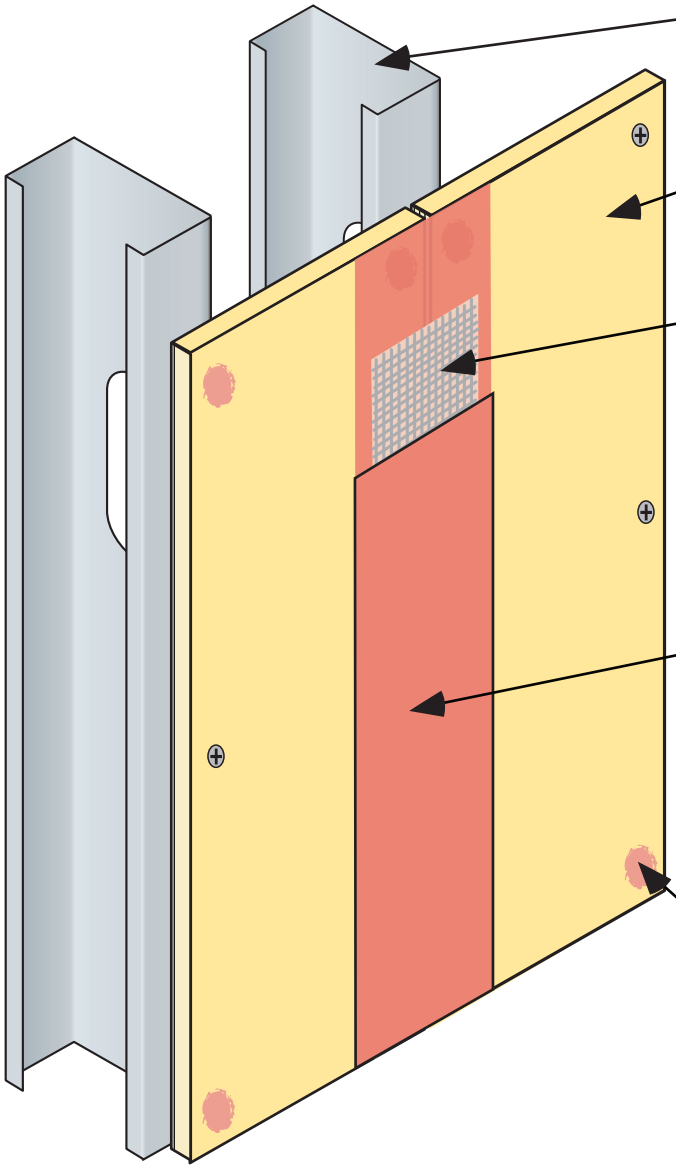

Light weight structural members

Sheathing

PROSOCO R-GUARD® Joint Fabric

embedded into a wet priming application of R-GUARD Spray Wrap, R-GUARD MVP or R-GUARD VB

PROSOCO R-GUARD® Spray Wrap, MVP or VB

Apply second coat of R-GUARD Spray Wrap, R-GUARD MVP or R-GUARD VB over Joint Fabric.

PROSOCO R-GUARD® Joint & Seam Filler

Spot overdriven screws.

PROSOCO installation guidelines are illustrations of construction. They are intended for use by the design/construction professional to assist in developing project-specific details. They should be modified where necessary to accommodate individual project conditions. Refer to appropriate PROSOCO specification and Product Data Sheet. Updated February, 2011.