


Prepare



*Fill, bridge and flash
rough opening preparation
Joint & Seam Filler & FastFlash*

www.prosoco.com


PROSOCO
SINCE 1939

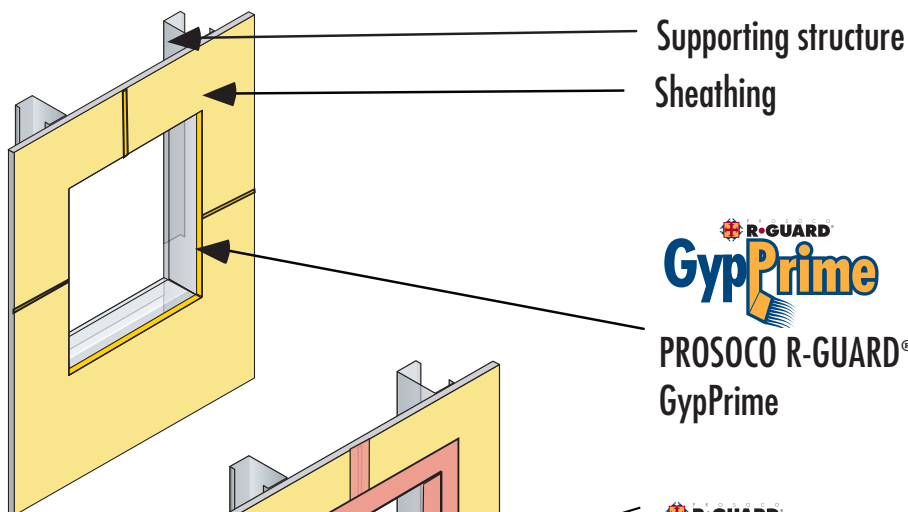

Supporting structure
Sheathing




PROSOCO R-GUARD®
GypPrime

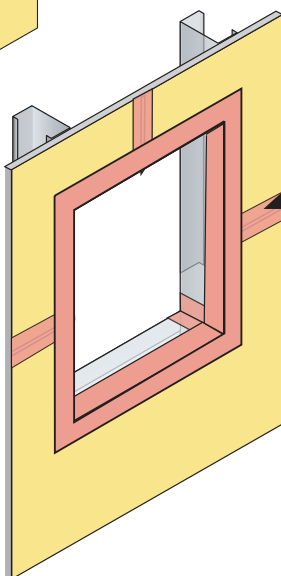

PROSOCO R-GUARD®
Joint & Seam Filler

1-inch beyond each seam edge to a
thickness of 20 - 30 mils.

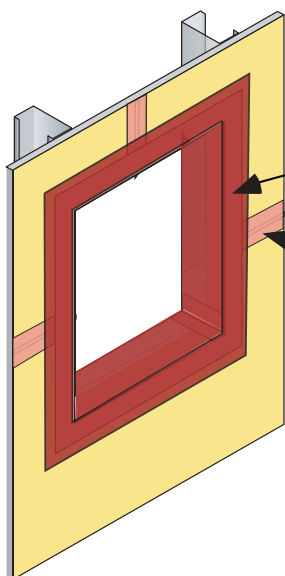

PROSOCO R-GUARD®
FastFlash

PROSOCO R-GUARD FastFlash over the
inside of the rough opening and extending
4-6" over the face of the structural wall



PROSOCO R-GUARD®
Joint & Seam Filler